
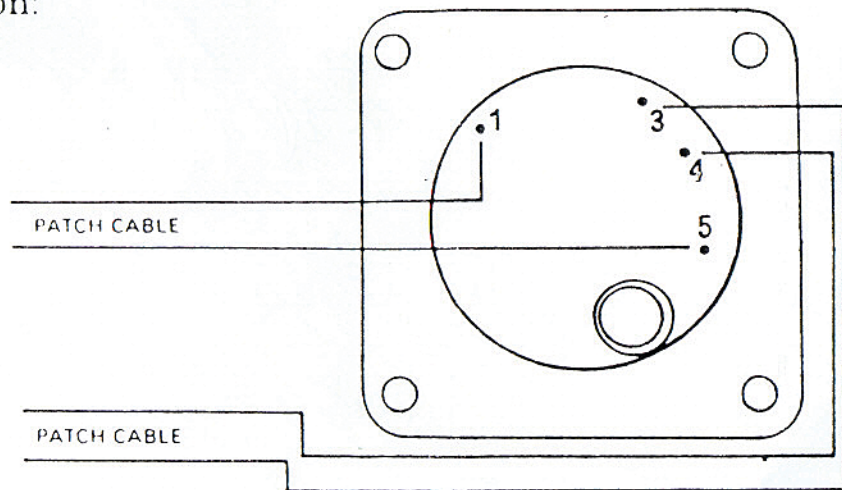


EXHAUST GAS TEMPERATURE/CYLINDER HEAD TEMPERATURE

Illustration of Instrument Connection:

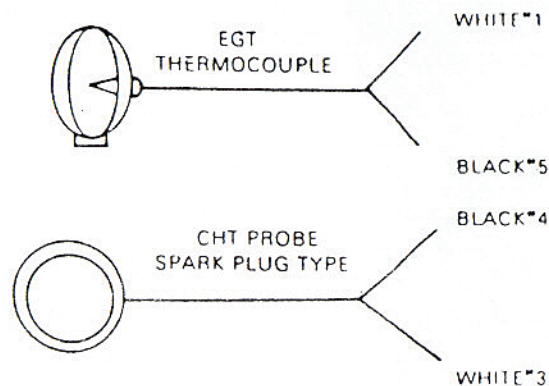

NOTE:

- 1) When installing the instrument from behind the panel use a $2\frac{1}{4}$ " hole. When installing the unit from in front of the panel use a $2\frac{1}{16}$ " hole. Use 4-#40 screws to hold instrument secure.

Light Aircraft Instruments

AIR TEAM, s.r.o.

Airport Brno-Medlanky

621 00 Brno

Phone: +420 725 508 058

Email: info@lightaircraftinstruments.eu

Web: www.lightaircraftinstruments.eu